


COPPER CABLE

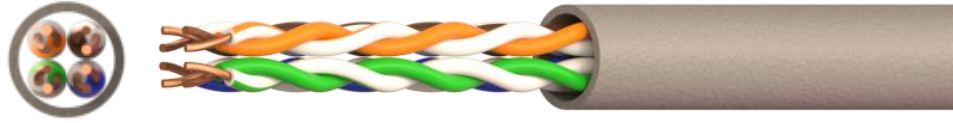

COPPER CABLE CAT 5E UTP 24AWG LSZH - Eca

CAT 5E	U/UTP	AWG 24	LSZH	Eca	INDOOR	BOX 305
---------------	--------------	---------------	-------------	------------	---------------	----------------

Application:

Primary (Campus), Secondary (Riser), Tertiary (Horizontal), IEEE 802.3an: 10Base-T; 100Base-TX; 1000Base-T, IEEE 802.5 16 MB; ISDN; TPDDI; ATM, IEEE 802.3af-2002: POE; IEEE 802.3at: POE+; conforming to European regulation "CPR" EN 50575

Conductor:	Material	Bare Copper
	AWG Size	24 AWG – 0.50 ±0.01
	Filler	-
Insulation:	Material	HDPE
	Thickness	-
	Diameter	Nominal: 0.92 ±0.08mm x 2C Twist
	Pair colors	Bl/WhBl, Or/WhOr, Gr/WhGr, Br/WhBr
	Unaged Elogation	-
	Unaged Tensile Strength	-
Screen	Material	-
Drain Wire	Material	-
Jacket:	Material	LSZH – CPR Eca
	Thickness	-
	Diameter	Nominal: 5.20 ±0.30 mm
	Color	Gray (RAL-7035)
	Unaged Elogation	-
	Unaged Tensile Strength	-
	Aging al 100°C for 168h	-
Marking	On cable (black – one per meter)	CABLE U/UTP CAT5E 4P AWG24 LSZH Eca - 212012-32 - ISO/IEC 11801 ANSI/TIA-568-C.2 <batch no.> <dd/mm/yy> <meter> m

Reference Standard

ISO/IEC 11801-1:2017(Ed. 1.0) / ISO/IEC 11801-2:2017(Ed. 1.0);	EN 60332-1-2 (Fire Performance)
EN 50173-1:2018 / EN 50173-2:2018	EN 61034-2 (Smoke Density)
IEC 61156-5:2020 (Ed.3.0);	EN 60754-2 (Halogen Free)
EN 50288-3-1:2013;	EN 50575 (Reaction to fire)
ANSI/TIA-568-D:2018;	CEI UNEL 36762 (C-4 - U ₀ =400V)

Electrical Characteristics and Performance

Frequency	ATTENUATION	NEXT	PSNEXT	RETURN LOSS	ACR-F	PSACR-F	ACR-N	PSACR-N
(MHz)	(dB/100m) Max.	(dB) Min.	(dB) Min.	(dB) Min.	(dB/100m) Min.	(dB/100m) Min.	(dB/100m) Min.	(dB/100m) Min.
4,0	4,1	56,3	53,3	23,0	52,0	49,0	52,2	49,2
10,0	6,5	50,3	47,3	25,0	44,0	41,0	43,8	40,8
16,0	8,3	47,2	44,2	25,0	39,9	36,9	39,0	36,0
31,25	11,7	42,9	39,9	23,6	34,1	31,1	31,1	28,1
62,5	17,0	38,4	35,4	21,5	28,1	25,1	21,4	18,4
100,0(*)	22,0	35,3	32,3	20,1	24,0	21,0	13,3	10,3

(*) Data above 250MHz is for reference only.

Max.Conductor DC Resistance at 20°C (Ω/Km)	<104.8
Operating Temperature Range (°C)	-25/70
Rated Temperature (°C)	60
Velocity ratio	Approx 68%
Impedance (Ω)	1-100MHz – (100±15)

Ordering information code

OC-CVR-212012-32

ORCA - COPPER CABLE CAT 5e U/UTP LSZH - Eca - Gray




 1014

21 DoP No. 170454 EN50575: 2014 OC-CVR-212012-32
<p>Supply of electricity and communications in buildings and other civil engineering works with the objective of limiting the generation and spread of fire and smoke.</p> <p>Reaction to Fire: Eca Dangerous Substance: None</p>  www.orca.it



OC-CVR-212012-32

Cable Category 5e UTP LSZH 305m
 Cabo Categoria 5e UTP LSZH 305m
 Câble Catégorie 5e UTP LSZH 305m
 Cable Categoria 5e UTP LSZH 305m
 Kabel Kategorie 5e UTP LSZH 305m

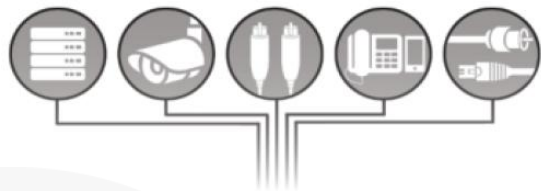

VERIFIED PERFORMANCES
 OF ANSI/TIA-568-C.2, ISO/IEC 11801

thank you for choosing ORCA Networking

MADE IN CHINA