

COPPER CAT. 5E

# COPPER PATCH PANEL CAT. 5E - UTP




## Description

ORCA® Category 5 Density Patch Panels provide excellent performance for high speed LANs from 10 Mb to Gigabit Ethernet applications. 2U 19" standard format is suitable for rack installation. High quality components and innovative IDC connection techniques with rear utilities colour coded for correct connection of UTP cable, and planar ring cable clips Front of the panel features easy to use slide in labels.

### Material Specification e Feature:

Main body	Material	Metal
	Dimension	2U
	Color	Black
PIN	Material	Phosphor Bronze
	Life	≥750 times
	TYPE	Dual Identity
IDC	Life	200 times of repeated threading
	AWG range:	22-26
	Number	48 - numbered and with label holder
Port	Type	RJ45 - Cat. 5E
	Shield	UTP
	Operation Temperature	-20 to 68 °C

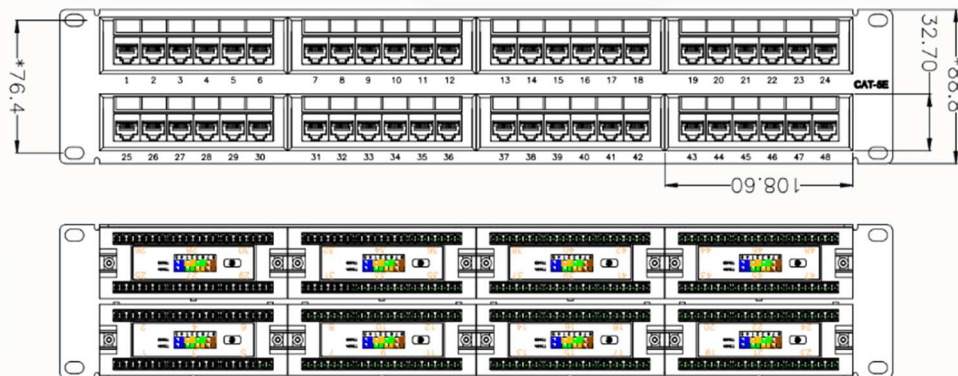

### Reference Standard:

ANSI/TIA-568-C

ISO/IEC 11801

RoHS Directive 2011/65/EU compliant

### Ordering Information code:

OC-PP5-272120-48 ORCA - PATCH PANEL CAT. 5E UTP, 1U, 48P LOADED