

LAN EQUIPMENT

SFP interface 155Mb MM Dual Fiber - 2km @850nm




Description

ORCA® standard SFP optical module. It uses two multi-mode optical fibers, the speed rate up to 155Mbps and the transmission distance up to 2km. This product can match up with fiber converter and optical Ethernet switch with SFP port, it can be used in Ethernet, telecom and optical fiber communication and other industries.

Feature:

SFP package with LC connector	Low EMI and excellent ESD protection
850nm VCSEL Laser and PIN photo detector	1a contact discharge 3 level, 1b air discharge 3 level
-8/-3 dBm Optical Power, -19 dBm Sensivity	IEC 61000-4-2
Up to 2km transmission on 50/125 um MMF	+3.3V single power supply, by host- 1W
Laser safety standard IEC-60825 compliant	LVPECL compatible data input/output interface
Dimension: 55,4 x 13,7 x 6,25mm - 17g	Material: Stainless Steel
Compatible with RoHS	Digital Diagnostic SFF-8472 compliant
Temperature range: Working 0 ~ 70°C Storage -40 ~ 70°C Humidity: 0 to 90% non-condensing	

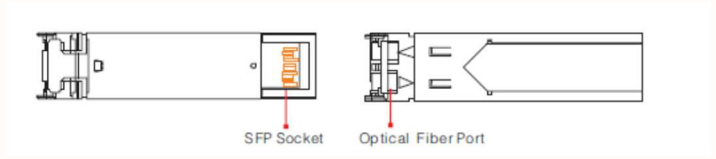

Ordering Information code:

OC-LAN-SFP-2

ORCA - SFP interface 155Mb MM LC Dual Fiber - 2km @850nm

Specifications subject to change without prior notice - For more details please visit www.orca.it