

COPPER CAT. 6

COPPER PATCH CORD CAT. 6 U/UTP



Description

Horizontal distribution and Backbone Cabling, IEEE 802.3an: 10Base-T; 100Base-TX; 1000Base-T, IEEE 802.5 4/16 MB; ISDN; ADSL; 100Mbps TP-PMD; 155 Mbps ATM; ROHS Compliant



Material Specification:

Type	U/UTP CAT.6 4*2*24AWG PVC	
Conductor	N. of pair	4
	Material	Bare copper wire
	Construction	7/0.18 ±0.008
Insulation	Material	HDPE
	Nom.O.D.	0.92 ±0.05
Cross	Material	PE (separator)
Shielding	Material	-
Braid	Material	-
	Construction	-
Jacket	Material	PVC
	Nom Thickness	0.6
	Nom.O.D.	5.9 ±0.20
Marking	UTP CAT.6 - 4PR 24AWG ISO/IEC 11801 TIA/EIA-568B (ETL)	
Standard meets:	ISO/IEC 11801, EN 50173-1, ISO 11801 class E	

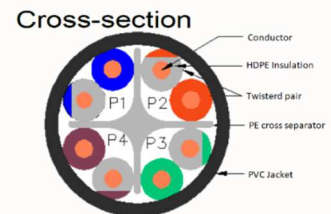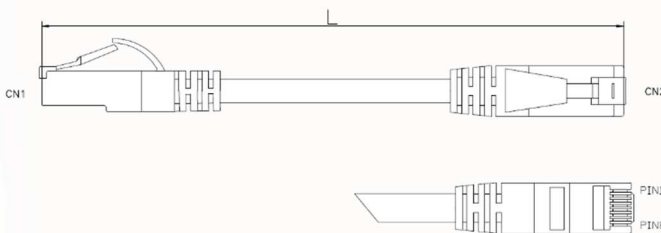

Ordering Information code:

Ordering Information code	Description	Y	X	Length
OC-PC6-223110-YX	ORCA - Copper Patch Cord Cat.6 UTP - Black	A	0	0,5m
OC-PC6-223140-YX	ORCA - Copper Patch Cord Cat.6 UTP - Grey	0	1	1 m
OC-PC6-223150-YX	ORCA - Copper Patch Cord Cat.6 UTP - Erica	0	2	2 m
OC-PC6-223160-YX	ORCA - Copper Patch Cord Cat.6 UTP - Blue	0	3	3 m
OC-PC6-223170-YX	ORCA - Copper Patch Cord Cat.6 UTP - Red	0	5	5 m
OC-PC6-223180-YX	ORCA - Copper Patch Cord Cat.6 UTP - Yellow	1	0	10 m
OC-PC6-223190-YX	ORCA - Copper Patch Cord Cat.6 UTP - Green			

Specifications subject to change without prior notice - For more details please visit www.orca.it