

**FIBER OPTIC TOOLS** 

## "O'RING" OTDR optical fiber launch

## Description




OTDR optical fiber launch cable is used to measure the loss and reflectivity of the proximal connection and the remote non-corrupt insertion of the optical fiber line using OTDR. Each OTDR launch cable can be used as an OTDR transmitting and receiving cable, both of which were necessary to eliminate blind spots when measuring the complete line loss of the optical fiber with OTDR.OTDR launch cable adopts coiled design, easy to carry, compact and light. Various length options, very suitable for short, medium, long distance fiber network test applications.

Features & Applications	
Compact, rugged, lightweight	For use as OTDR launch cable
150m, 550m, 1000m, 2000m lengths standard	For use as OTDR receive cable
OM1, OM2, OM3, OM4, OM5, G652.D, G657A	SC - LC - FC - ST /APC connectors
Available with a variety of connector styles Compact!	Use to test link loss with an OTDR
145*135*35mm	≤o.5dBm/KM
Carabiner, handle and bag supplied.	Compartment for optical adapters on board.
Fits easily in OTDR cases or kits Adapters special storage bin design.	
Measure insertion loss and reflectance of near- and far-end connections of a fiber optic link using an OTDR.	

Use the Fiber Ring as a launch cable; connect the Fiber Ring between your OTDR and the fiber link under test. This will allow you to measure the loss of the near-end connection.

Use the Fibre Ring as a receive cable; connect the Fiber Ring the far-end connector of your fibre link under test. This will allow you to measure the loss of the far-end connection.

Use a pair of Fibre Ring between your OTDR and the hypothetical far-end connector of your fibre link to identify and measure the correct length of the optical link.

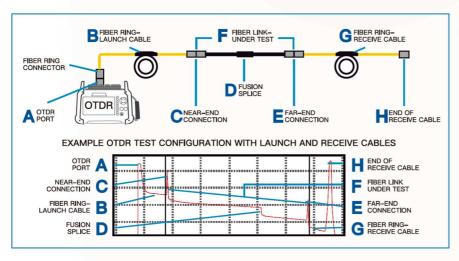



## Ordering Information code:

OC-FTL-R550A-SM-SCSCA OTDR O'Ring fiber launch cable, OS2 550m G657.A1 SC/UPC - SC/APC OC-FTL-R550-SM-SCSC OTDR O'Ring fiber launch cable, OS2 550m G652D SC/UPC - SC/UPC

agg. 12/2023