

FTTx SOLUTION

FIBER OPTIC TERMINAL BOX 4 PORTS




Description

ORCA®'s fiber access termination box is able to hold up to 4 SC subscribers. It is used as a termination point for the feeder cable to connect with drop cable in FTTX network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid protection box; Manage fibers in a reasonable fiber radius condition, easy to maintain and extend the capacity, fiber bend radius control more than 40mm. Suitable for the fusion splice or mechanical splice.

Application and Feature:

Widely Used In FTTH Access Network	CATV Networks
Telecommunication Networks	Data Communications Networks
Local Area Networks	
Industry Standard User Interface, be made of PC+ABS, high impact plastic.	
Can accommodate 1×8 PLC splitter	
Anti-UV, ultra violet resistant and rainfall resistant, Water-proof design with IP-65 Protection level.	
Temperatures: -40°C-- 75°C - Humidity: 93% at 40°C - Air Pressure: 62kPa - 101kPa	
Up to 4 FTTH drops, SCsc or LCsd	1 inlet ports, 4 outlet ports
Adapter slots used - No screws and tools needed for installing adapters	
Max allowance for entry cables: max diameter from 3 to 9 mm, up to 1 cables	
Max allowance for exit cables: up to 4 simplex drop cables, 3 mm	
Wall and pole mountable, Lock provided for extra security	
Cable fixing units provided for fixing the outdoor optical cable.	

Dimensions: 185mm x 115mm x 40mm (H x W x D) Installation size D 195mm - 0,25Kg

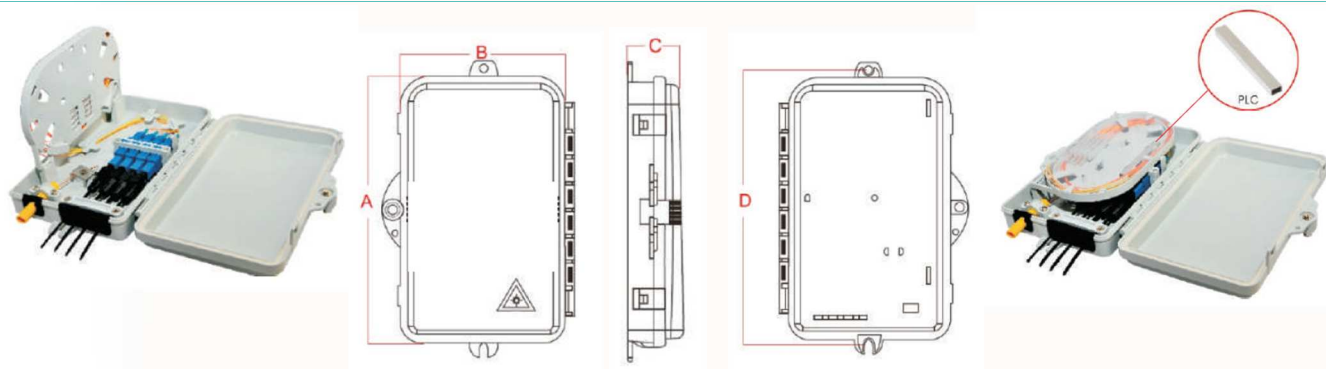

Ordering Information code:

OC-FTTH-900001-04H ORCA - Terminal box FTTH - 4 subscribers